

MATH 304  
Linear Algebra

**Lecture 4:**  
**System with a parameter.**  
**Applications of systems of linear equations.**

## System with a parameter.

$$\begin{cases} y + 3z = 0 \\ x + y - 2z = 0 \\ x + 2y + az = 0 \end{cases} \quad (a \in \mathbb{R})$$

The system is **homogeneous** (all right-hand sides are zeros). Therefore it is consistent ( $x = y = z = 0$  is a solution).

Augmented matrix: 
$$\left( \begin{array}{ccc|c} 0 & 1 & 3 & 0 \\ 1 & 1 & -2 & 0 \\ 1 & 2 & a & 0 \end{array} \right)$$

Since the 1st row cannot serve as a pivotal one, we interchange it with the 2nd row:

$$\left( \begin{array}{ccc|c} 0 & 1 & 3 & 0 \\ 1 & 1 & -2 & 0 \\ 1 & 2 & a & 0 \end{array} \right) \rightarrow \left( \begin{array}{ccc|c} 1 & 1 & -2 & 0 \\ 0 & 1 & 3 & 0 \\ 1 & 2 & a & 0 \end{array} \right)$$

Now we can start the elimination.

First subtract the 1st row from the 3rd row:

$$\left( \begin{array}{ccc|c} 1 & 1 & -2 & 0 \\ 0 & 1 & 3 & 0 \\ 1 & 2 & a & 0 \end{array} \right) \rightarrow \left( \begin{array}{ccc|c} 1 & 1 & -2 & 0 \\ 0 & 1 & 3 & 0 \\ 0 & 1 & a+2 & 0 \end{array} \right)$$

The 2nd row is our new pivotal row.

Subtract the 2nd row from the 3rd row:

$$\left( \begin{array}{ccc|c} 1 & 1 & -2 & 0 \\ 0 & 1 & 3 & 0 \\ 0 & 1 & a+2 & 0 \end{array} \right) \rightarrow \left( \begin{array}{ccc|c} 1 & 1 & -2 & 0 \\ 0 & 1 & 3 & 0 \\ 0 & 0 & a-1 & 0 \end{array} \right)$$

At this point row reduction splits into two cases.

**Case 1:**  $a \neq 1$ . In this case, multiply the 3rd row by  $(a - 1)^{-1}$ :

$$\left( \begin{array}{ccc|c} 1 & 1 & -2 & 0 \\ 0 & 1 & 3 & 0 \\ 0 & 0 & a-1 & 0 \end{array} \right) \rightarrow \left( \begin{array}{ccc|c} \boxed{1} & 1 & -2 & 0 \\ 0 & \boxed{1} & 3 & 0 \\ 0 & 0 & \boxed{1} & 0 \end{array} \right)$$

*The matrix is converted into row echelon form.*

*We proceed towards reduced row echelon form.*

Subtract 3 times the 3rd row from the 2nd row:

$$\left( \begin{array}{ccc|c} 1 & 1 & -2 & 0 \\ 0 & 1 & 3 & 0 \\ 0 & 0 & 1 & 0 \end{array} \right) \rightarrow \left( \begin{array}{ccc|c} 1 & 1 & -2 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 1 & 0 \end{array} \right)$$

Add 2 times the 3rd row to the 1st row:

$$\left( \begin{array}{ccc|c} 1 & 1 & -2 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 1 & 0 \end{array} \right) \rightarrow \left( \begin{array}{ccc|c} 1 & 1 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 1 & 0 \end{array} \right)$$

Finally, subtract the 2nd row from the 1st row:

$$\left( \begin{array}{ccc|c} 1 & 1 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 1 & 0 \end{array} \right) \rightarrow \left( \begin{array}{ccc|c} \boxed{1} & 0 & 0 & 0 \\ 0 & \boxed{1} & 0 & 0 \\ 0 & 0 & \boxed{1} & 0 \end{array} \right)$$

Thus  $x = y = z = 0$  is the only solution.

**Case 2:**  $a = 1$ . In this case, the matrix is already in row echelon form:

$$\left( \begin{array}{ccc|c} \boxed{1} & 1 & -2 & 0 \\ 0 & \boxed{1} & 3 & 0 \\ 0 & 0 & 0 & 0 \end{array} \right)$$

To get reduced row echelon form, subtract the 2nd row from the 1st row:

$$\left( \begin{array}{ccc|c} 1 & 1 & -2 & 0 \\ 0 & 1 & 3 & 0 \\ 0 & 0 & 0 & 0 \end{array} \right) \rightarrow \left( \begin{array}{ccc|c} \boxed{1} & 0 & -5 & 0 \\ 0 & \boxed{1} & 3 & 0 \\ 0 & 0 & 0 & 0 \end{array} \right)$$

$z$  is a free variable.

$$\begin{cases} x - 5z = 0 \\ y + 3z = 0 \end{cases} \iff \begin{cases} x = 5z \\ y = -3z \end{cases}$$

## System of linear equations:

$$\begin{cases} y + 3z = 0 \\ x + y - 2z = 0 \\ x + 2y + az = 0 \end{cases}$$

**Solution:** If  $a \neq 1$  then  $(x, y, z) = (0, 0, 0)$ ;  
if  $a = 1$  then  $(x, y, z) = (5t, -3t, t)$ ,  $t \in \mathbb{R}$ .

## Applications of systems of linear equations

**Problem 1.** Find the point of intersection of the lines  $x - y = -2$  and  $2x + 3y = 6$  in  $\mathbb{R}^2$ .

$$\begin{cases} x - y = -2 \\ 2x + 3y = 6 \end{cases}$$

**Problem 2.** Find the point of intersection of the planes  $x - y = 2$ ,  $2x - y - z = 3$ , and  $x + y + z = 6$  in  $\mathbb{R}^3$ .

$$\begin{cases} x - y = 2 \\ 2x - y - z = 3 \\ x + y + z = 6 \end{cases}$$



*Method of undetermined coefficients* often involves solving systems of linear equations.

**Problem 3.** Find a quadratic polynomial  $p(x)$  such that  $p(1) = 4$ ,  $p(2) = 3$ , and  $p(3) = 4$ .

Suppose that  $p(x) = ax^2 + bx + c$ . Then  
 $p(1) = a + b + c$ ,  $p(2) = 4a + 2b + c$ ,  
 $p(3) = 9a + 3b + c$ .

$$\begin{cases} a + b + c = 4 \\ 4a + 2b + c = 3 \\ 9a + 3b + c = 4 \end{cases}$$

*Method of undetermined coefficients* often involves solving systems of linear equations.

**Problem 3.** Find a quadratic polynomial  $p(x)$  such that  $p(1) = 4$ ,  $p(2) = 3$ , and  $p(3) = 4$ .

*Alternative choice of coefficients:*  $p(x) = \tilde{a} + \tilde{b}x + \tilde{c}x^2$ .

Then  $p(1) = \tilde{a} + \tilde{b} + \tilde{c}$ ,  $p(2) = \tilde{a} + 2\tilde{b} + 4\tilde{c}$ ,  
 $p(3) = \tilde{a} + 3\tilde{b} + 9\tilde{c}$ .

$$\begin{cases} \tilde{a} + \tilde{b} + \tilde{c} = 4 \\ \tilde{a} + 2\tilde{b} + 4\tilde{c} = 3 \\ \tilde{a} + 3\tilde{b} + 9\tilde{c} = 4 \end{cases}$$


**Problem 4.** Evaluate  $\int_0^1 \frac{x(x-3)}{(x-1)^2(x+2)} dx$ .

To evaluate the integral, we need to decompose the rational function  $R(x) = \frac{x(x-3)}{(x-1)^2(x+2)}$  into a sum of partial fractions:


$$\begin{aligned} R(x) &= \frac{a}{x-1} + \frac{b}{(x-1)^2} + \frac{c}{x+2} \\ &= \frac{a(x-1)(x+2) + b(x+2) + c(x-1)^2}{(x-1)^2(x+2)} \\ &= \frac{(a+c)x^2 + (a+b-2c)x + (-2a+2b+c)}{(x-1)^2(x+2)}. \end{aligned}$$

$$\begin{cases} a + c = 1 \\ a + b - 2c = -3 \\ -2a + 2b + c = 0 \end{cases}$$


## Traffic flow

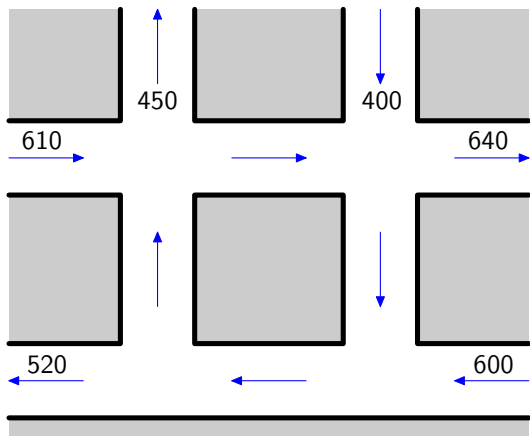

**Problem.** Determine the amount of traffic between each of the four intersections.

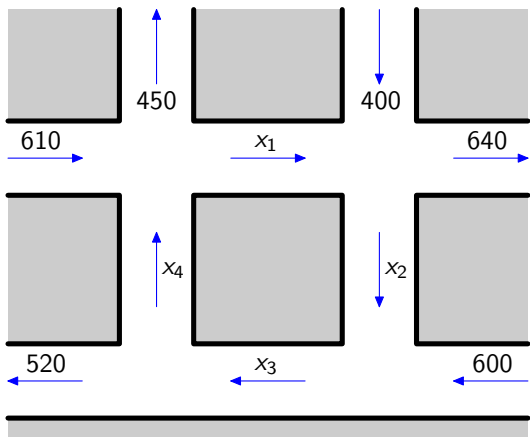

$$x_1 = ?, \quad x_2 = ?, \quad x_3 = ?, \quad x_4 = ?$$

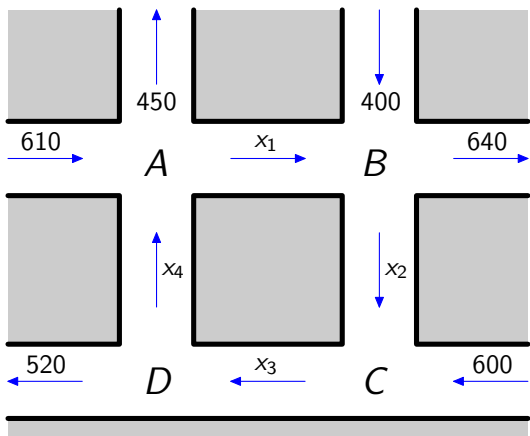

At each intersection, the incoming traffic has to match the outgoing traffic.

$$\text{Intersection } A: \quad x_4 + 610 = x_1 + 450$$

$$\text{Intersection } B: \quad x_1 + 400 = x_2 + 640$$


$$\text{Intersection } C: \quad x_2 + 600 = x_3$$

$$\text{Intersection } D: \quad x_3 = x_4 + 520$$

$$\begin{cases} x_4 + 610 = x_1 + 450 \\ x_1 + 400 = x_2 + 640 \\ x_2 + 600 = x_3 \\ x_3 = x_4 + 520 \end{cases}$$


$$\iff \begin{cases} -x_1 + x_4 = -160 \\ x_1 - x_2 = 240 \\ x_2 - x_3 = -600 \\ x_3 - x_4 = 520 \end{cases}$$

# Electrical network

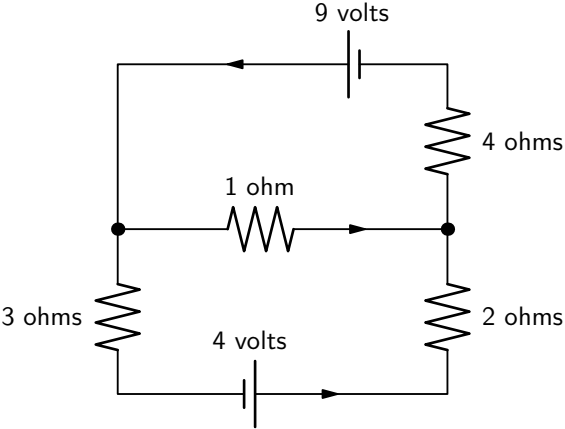


**Problem.** Determine the amount of current in each branch of the network.




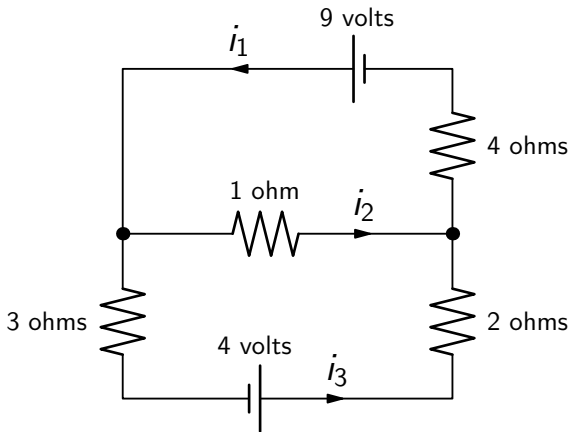

$$i_1 = ?, \quad i_2 = ?, \quad i_3 = ?$$

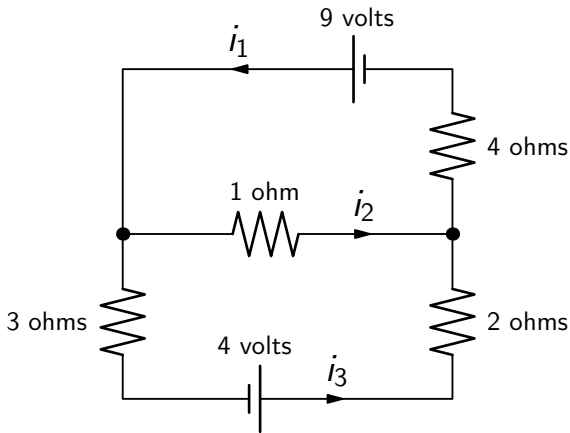

**Kirchhof's law #1 (junction rule):** at every node the sum of the incoming currents equals the sum of the outgoing currents.

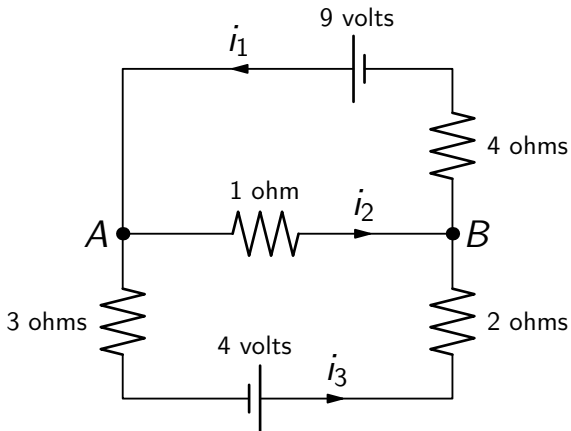

Node A:  $i_1 = i_2 + i_3$

Node B:  $i_2 + i_3 = i_1$

## Electrical network

**Kirchhof's law #2 (loop rule):** around every loop the algebraic sum of all voltages is zero.

**Ohm's law:** for every resistor the voltage drop  $E$ , the current  $i$ , and the resistance  $R$  satisfy  $E = iR$ .

$$\text{Top loop: } 9 - i_2 - 4i_1 = 0$$

$$\text{Bottom loop: } 4 - 2i_3 + i_2 - 3i_3 = 0$$

$$\text{Big loop: } 4 - 2i_3 - 4i_1 + 9 - 3i_3 = 0$$

*Remark.* The 3rd equation is the sum of the first two equations.

$$\begin{cases} i_1 = i_2 + i_3 \\ 9 - i_2 - 4i_1 = 0 \\ 4 - 2i_3 + i_2 - 3i_3 = 0 \end{cases}$$

$$\iff \begin{cases} i_1 - i_2 - i_3 = 0 \\ 4i_1 + i_2 = 9 \\ -i_2 + 5i_3 = 4 \end{cases}$$