

MATH 323  
Linear Algebra

**Lecture 3:**  
**Gauss-Jordan reduction (continued).**  
**Applications of systems of linear equations.**

The goal of the **Gauss-Jordan reduction** is to convert the augmented matrix into **reduced row echelon form**:

$$\left( \begin{array}{cccc|ccc} \boxed{1} & * & * & * & * & * & * \\ & \boxed{1} & \circledast & \circledast & * & * & * \\ & & & \boxed{1} & \circledast & * & * \\ & & & & \boxed{1} & * & * \\ & & & & & \boxed{1} & \circledast & \circledast & * \end{array} \right)$$

- leading entries are boxed;
- all entries below the staircase line are zero;
- each boxed entry is 1, the other entries in its column are zero;
- each circle corresponds to a free variable.

## How to solve a system of linear equations

- Order the variables.
- Write down the augmented matrix of the system.
- Convert the matrix to **row echelon form**.
- Check for consistency.
- Convert the matrix to **reduced row echelon form**.
- Write down the system corresponding to the reduced row echelon form.
- Determine leading and free variables.
- Rewrite the system so that the leading variables are on the left while everything else is on the right.
- Assign parameters to the free variables and write down the general solution in parametric form.

**New example.** 
$$\begin{cases} x_2 + 2x_3 + 3x_4 = 6 \\ x_1 + 2x_2 + 3x_3 + 4x_4 = 10 \end{cases}$$

Variables:  $x_1, x_2, x_3, x_4$ .

Augmented matrix: 
$$\left( \begin{array}{cccc|c} 0 & 1 & 2 & 3 & 6 \\ 1 & 2 & 3 & 4 & 10 \end{array} \right)$$

To get it into row echelon form, we exchange the two rows:

$$\left( \begin{array}{cccc|c} 1 & 2 & 3 & 4 & 10 \\ 0 & 1 & 2 & 3 & 6 \end{array} \right)$$

Consistency check is passed. To convert into reduced row echelon form, add  $-2$  times the 2nd row to the 1st row:

$$\left( \begin{array}{cccc|c} \boxed{1} & 0 & -1 & -2 & -2 \\ 0 & \boxed{1} & 2 & 3 & 6 \end{array} \right)$$

The leading variables are  $x_1$  and  $x_2$ ; hence  $x_3$  and  $x_4$  are free variables.

Back to the system:

$$\begin{cases} x_1 - x_3 - 2x_4 = -2 \\ x_2 + 2x_3 + 3x_4 = 6 \end{cases} \iff \begin{cases} x_1 = x_3 + 2x_4 - 2 \\ x_2 = -2x_3 - 3x_4 + 6 \end{cases}$$

General solution:

$$\begin{cases} x_1 = t + 2s - 2 \\ x_2 = -2t - 3s + 6 \\ x_3 = t \\ x_4 = s \end{cases} \quad (t, s \in \mathbb{R})$$

In vector form,  $(x_1, x_2, x_3, x_4) =$   
 $= (-2, 6, 0, 0) + t(1, -2, 1, 0) + s(2, -3, 0, 1).$

### Example with a parameter.

$$\begin{cases} y + 3z = 0 \\ x + y - 2z = 0 \\ x + 2y + az = 0 \end{cases} \quad (a \in \mathbb{R})$$

The system is **homogeneous** (all right-hand sides are zeros). Therefore it is consistent ( $x = y = z = 0$  is a solution).

Augmented matrix: 
$$\left( \begin{array}{ccc|c} 0 & 1 & 3 & 0 \\ 1 & 1 & -2 & 0 \\ 1 & 2 & a & 0 \end{array} \right)$$

Since the 1st row cannot serve as a pivotal one, we interchange it with the 2nd row:

$$\left( \begin{array}{ccc|c} 0 & 1 & 3 & 0 \\ 1 & 1 & -2 & 0 \\ 1 & 2 & a & 0 \end{array} \right) \rightarrow \left( \begin{array}{ccc|c} 1 & 1 & -2 & 0 \\ 0 & 1 & 3 & 0 \\ 1 & 2 & a & 0 \end{array} \right)$$

Now we can start the elimination.

First subtract the 1st row from the 3rd row:

$$\left( \begin{array}{ccc|c} 1 & 1 & -2 & 0 \\ 0 & 1 & 3 & 0 \\ 1 & 2 & a & 0 \end{array} \right) \rightarrow \left( \begin{array}{ccc|c} 1 & 1 & -2 & 0 \\ 0 & 1 & 3 & 0 \\ 0 & 1 & a+2 & 0 \end{array} \right)$$

The 2nd row is our new pivotal row.

Subtract the 2nd row from the 3rd row:

$$\left( \begin{array}{ccc|c} 1 & 1 & -2 & 0 \\ 0 & 1 & 3 & 0 \\ 0 & 1 & a+2 & 0 \end{array} \right) \rightarrow \left( \begin{array}{ccc|c} 1 & 1 & -2 & 0 \\ 0 & 1 & 3 & 0 \\ 0 & 0 & a-1 & 0 \end{array} \right)$$

At this point row reduction splits into two cases.

**Case 1:**  $a \neq 1$ . In this case, multiply the 3rd row by  $(a - 1)^{-1}$ :

$$\left( \begin{array}{ccc|c} 1 & 1 & -2 & 0 \\ 0 & 1 & 3 & 0 \\ 0 & 0 & a-1 & 0 \end{array} \right) \rightarrow \left( \begin{array}{ccc|c} \boxed{1} & 1 & -2 & 0 \\ 0 & \boxed{1} & 3 & 0 \\ 0 & 0 & \boxed{1} & 0 \end{array} \right)$$

*The matrix is converted into row echelon form.*

*We proceed towards reduced row echelon form.*

Subtract 3 times the 3rd row from the 2nd row:

$$\left( \begin{array}{ccc|c} 1 & 1 & -2 & 0 \\ 0 & 1 & 3 & 0 \\ 0 & 0 & 1 & 0 \end{array} \right) \rightarrow \left( \begin{array}{ccc|c} 1 & 1 & -2 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 1 & 0 \end{array} \right)$$



Add 2 times the 3rd row to the 1st row:

$$\left( \begin{array}{ccc|c} 1 & 1 & -2 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 1 & 0 \end{array} \right) \rightarrow \left( \begin{array}{ccc|c} 1 & 1 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 1 & 0 \end{array} \right)$$

Finally, subtract the 2nd row from the 1st row:

$$\left( \begin{array}{ccc|c} 1 & 1 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 1 & 0 \end{array} \right) \rightarrow \left( \begin{array}{ccc|c} \boxed{1} & 0 & 0 & 0 \\ 0 & \boxed{1} & 0 & 0 \\ 0 & 0 & \boxed{1} & 0 \end{array} \right)$$

Thus  $x = y = z = 0$  is the only solution.

**Case 2:**  $a = 1$ . In this case, the matrix is already in row echelon form:

$$\left( \begin{array}{ccc|c} \boxed{1} & 1 & -2 & 0 \\ 0 & \boxed{1} & 3 & 0 \\ 0 & 0 & 0 & 0 \end{array} \right)$$

To get reduced row echelon form, subtract the 2nd row from the 1st row:

$$\left( \begin{array}{ccc|c} 1 & 1 & -2 & 0 \\ 0 & 1 & 3 & 0 \\ 0 & 0 & 0 & 0 \end{array} \right) \rightarrow \left( \begin{array}{ccc|c} \boxed{1} & 0 & -5 & 0 \\ 0 & \boxed{1} & 3 & 0 \\ 0 & 0 & 0 & 0 \end{array} \right)$$

$z$  is a free variable.

$$\begin{cases} x - 5z = 0 \\ y + 3z = 0 \end{cases} \iff \begin{cases} x = 5z \\ y = -3z \end{cases}$$

## System of linear equations:

$$\begin{cases} y + 3z = 0 \\ x + y - 2z = 0 \\ x + 2y + az = 0 \end{cases}$$

**Solution:** If  $a \neq 1$  then  $(x, y, z) = (0, 0, 0)$ ;  
if  $a = 1$  then  $(x, y, z) = (5t, -3t, t)$ ,  $t \in \mathbb{R}$ .

**Theorem** Any matrix can be converted into row echelon form by applying elementary row operations.

*Sketch of the proof:* The proof is by induction on the number of columns in the matrix. It relies on the next lemma.

**Lemma** Any matrix can be converted to one of the following forms using elementary row operations: **(i)**  $(1 \ a_{12} \ a_{13} \ \dots \ a_{1n})$ ;

$$\text{(ii)} \left( \begin{array}{c|ccc} 1 & a_{12} & \dots & a_{1n} \\ \hline 0 & & & \\ \vdots & & & \\ 0 & & & \end{array} \right); \text{ (iii)} \left( \begin{array}{c} 1 \\ 0 \\ \vdots \\ 0 \end{array} \right); \text{ (iv)} \left( \begin{array}{c|c} 0 & \\ \vdots & B \\ 0 & \end{array} \right); \text{ (v)} \left( \begin{array}{c} 0 \\ \vdots \\ 0 \end{array} \right).$$

In the cases (i), (iii) and (v), we already have a row echelon form. In the cases (ii) and (iv), it is enough to convert the matrix  $B$  to row echelon form. Moreover, the row reduction on the block  $B$  can be simulated by applying elementary row operations to the entire matrix.

## Properties of row echelon form

Let  $C$  be a matrix in the row echelon form (resp. reduced row echelon form). We say that  $C$  is a **row echelon form** (resp. **reduced row echelon form**) of a matrix  $A$  if  $C$  can be obtained from  $A$  by applying elementary row operations.

**Theorem 1** For any matrix, the reduced row echelon form exists and is unique.

**Theorem 2** Suppose  $A$  and  $B$  are matrices of the same dimensions. Then the following conditions are equivalent:

- (i)  $A$  and  $B$  share a reduced row echelon form;
- (ii)  $A$  and  $B$  share a row echelon form;
- (iii)  $A$  can be obtained from  $B$  by applying elementary row operations.

## Applications of systems of linear equations

**Problem 1.** Find the point of intersection of the lines  $x - y = -2$  and  $2x + 3y = 6$  in  $\mathbb{R}^2$ .

$$\begin{cases} x - y = -2 \\ 2x + 3y = 6 \end{cases}$$

**Problem 2.** Find the point of intersection of the planes  $x - y = 2$ ,  $2x - y - z = 3$ , and  $x + y + z = 6$  in  $\mathbb{R}^3$ .

$$\begin{cases} x - y = 2 \\ 2x - y - z = 3 \\ x + y + z = 6 \end{cases}$$

*Method of undetermined coefficients* often involves solving systems of linear equations.

**Problem 3.** Find a quadratic polynomial  $p(x)$  such that  $p(1) = 4$ ,  $p(2) = 3$ , and  $p(3) = 4$ .

Suppose that  $p(x) = ax^2 + bx + c$ . Then  
 $p(1) = a + b + c$ ,  $p(2) = 4a + 2b + c$ ,  
 $p(3) = 9a + 3b + c$ .

$$\begin{cases} a + b + c = 4 \\ 4a + 2b + c = 3 \\ 9a + 3b + c = 4 \end{cases}$$

*Method of undetermined coefficients* often involves solving systems of linear equations.

**Problem 3.** Find a quadratic polynomial  $p(x)$  such that  $p(1) = 4$ ,  $p(2) = 3$ , and  $p(3) = 4$ .

*Alternative choice of coefficients:*  $p(x) = \tilde{a} + \tilde{b}x + \tilde{c}x^2$ .


Then  $p(1) = \tilde{a} + \tilde{b} + \tilde{c}$ ,  $p(2) = \tilde{a} + 2\tilde{b} + 4\tilde{c}$ ,

$p(3) = \tilde{a} + 3\tilde{b} + 9\tilde{c}$ .


$$\begin{cases} \tilde{a} + \tilde{b} + \tilde{c} = 4 \\ \tilde{a} + 2\tilde{b} + 4\tilde{c} = 3 \\ \tilde{a} + 3\tilde{b} + 9\tilde{c} = 4 \end{cases}$$




## Traffic flow

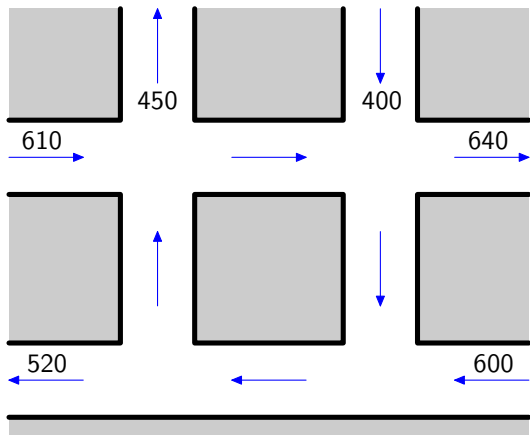

**Problem.** Determine the amount of traffic between each of the four intersections.

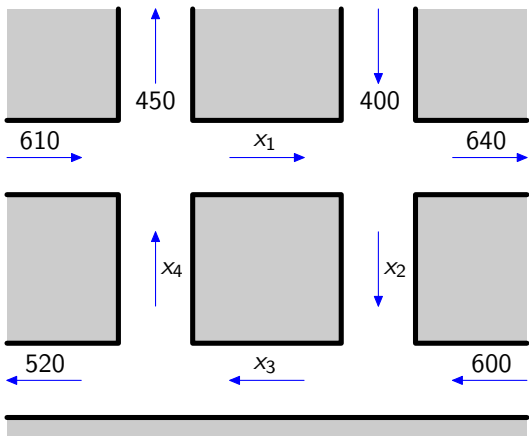

$$x_1 = ?, \quad x_2 = ?, \quad x_3 = ?, \quad x_4 = ?$$

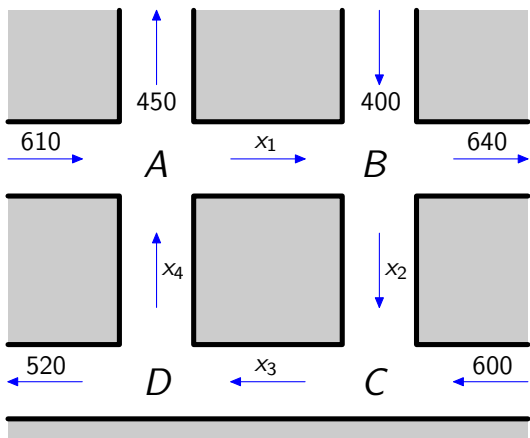

At each intersection, the incoming traffic has to match the outgoing traffic.

$$\text{Intersection } A: \quad x_4 + 610 = x_1 + 450$$

$$\text{Intersection } B: \quad x_1 + 400 = x_2 + 640$$


$$\text{Intersection } C: \quad x_2 + 600 = x_3$$

$$\text{Intersection } D: \quad x_3 = x_4 + 520$$


$$\begin{cases} x_4 + 610 = x_1 + 450 \\ x_1 + 400 = x_2 + 640 \\ x_2 + 600 = x_3 \\ x_3 = x_4 + 520 \end{cases}$$

$$\iff \begin{cases} -x_1 + x_4 = -160 \\ x_1 - x_2 = 240 \\ x_2 - x_3 = -600 \\ x_3 - x_4 = 520 \end{cases}$$


# Electrical network

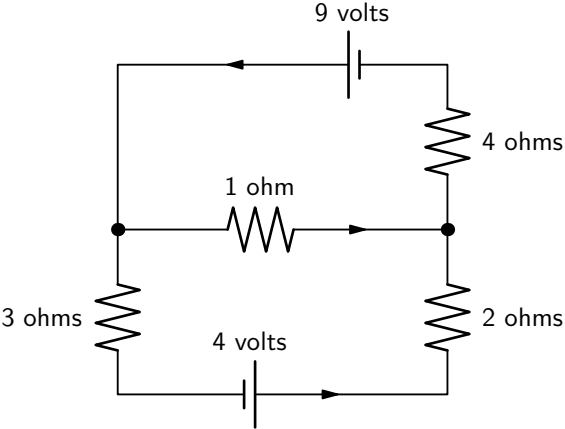


**Problem.** Determine the amount of current in each branch of the network.

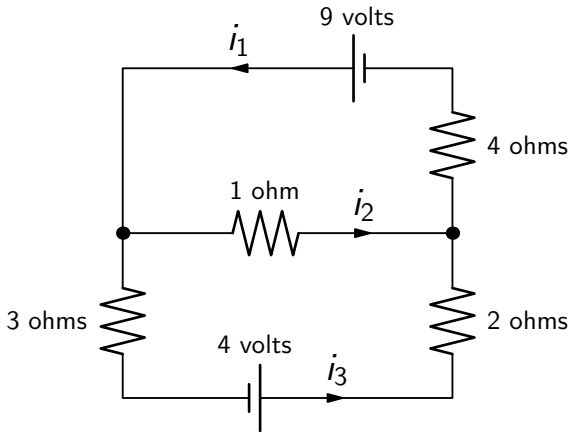

$$i_1 = ?, \quad i_2 = ?, \quad i_3 = ?$$

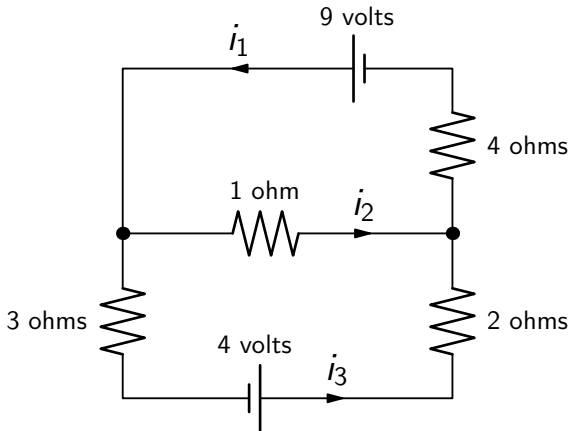

**Kirchhof's law #1 (junction rule):** at every node the sum of the incoming currents equals the sum of the outgoing currents.

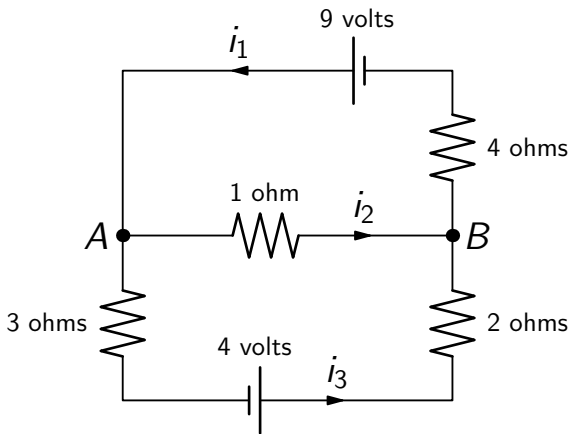

Node A:  $i_1 = i_2 + i_3$

Node B:  $i_2 + i_3 = i_1$



## Electrical network

**Kirchhof's law #2 (loop rule):** around every loop the algebraic sum of all voltages is zero.

**Ohm's law:** for every resistor the voltage drop  $E$ , the current  $i$ , and the resistance  $R$  satisfy  $E = iR$ .

$$\text{Top loop: } 9 - i_2 - 4i_1 = 0$$

$$\text{Bottom loop: } 4 - 2i_3 + i_2 - 3i_3 = 0$$

$$\text{Big loop: } 4 - 2i_3 - 4i_1 + 9 - 3i_3 = 0$$

*Remark.* The 3rd equation is the sum of the first two equations.

$$\begin{cases} i_1 = i_2 + i_3 \\ 9 - i_2 - 4i_1 = 0 \\ 4 - 2i_3 + i_2 - 3i_3 = 0 \end{cases}$$

$$\iff \begin{cases} i_1 - i_2 - i_3 = 0 \\ 4i_1 + i_2 = 9 \\ -i_2 + 5i_3 = 4 \end{cases}$$